


P.O. BOX 581
SOUTH WELFLEET, MA 02663

Architect and Landscape Architect

HADLEY CROW STUDIO
Architecture and Landscape Architecture
P. O. BOX 1917 ORLEANS MA 02853
508.255.8001 info@HADLEYCROWSTUDIO.COM

Consulting Engineers

 **ROBERT SILMAN ASSOCIATES**
STRUCTURAL ENGINEERS
123 South Street, 4th Floor
Boston, MA 02111
P 617/495-8700 F 606/221-6416

Plumbing Mechanical Electrical Engine
JOHNSON ENGINEERING AND DESIGN, INC.
5 Elm Street, Suite 14, Danvers, MA 01923

Plumbing Mechanical Electrical Engine
JOHNSON ENGINEERING AND DESIGN, INC.
5 Elm Street, Suite 14, Danvers, MA 01923

Preservation Consultant

Rika Smith-McNally & Associate
Conservators of Objects and Sculpture

59 Fountain Street Box 55
4th Floor East, Studio 15
Framingham, MA 01702

Rika Smith-McNally & Associate
Conservators of Objects and Sculpture

59 Fountain Street Box 55
4th Floor East, Studio 15
Framingham, MA 01702

W
D
S
M
T

HADLEY CROW STUDIO

Architecture and Landscape Architecture
P. O. BOX 1917 ORLEANS MA 02655
508.255.8001 info@HADLEYCROWSTUDIO.COM

SMNASTJ

SOUTH WELFLEET, MA 02663


REV	DATE	ISSUED FOR

EAST
ELEVATION

DATE: 01/27/2013

SCALE: 1/4" = 1'-0"

DWG. NO. A-4033

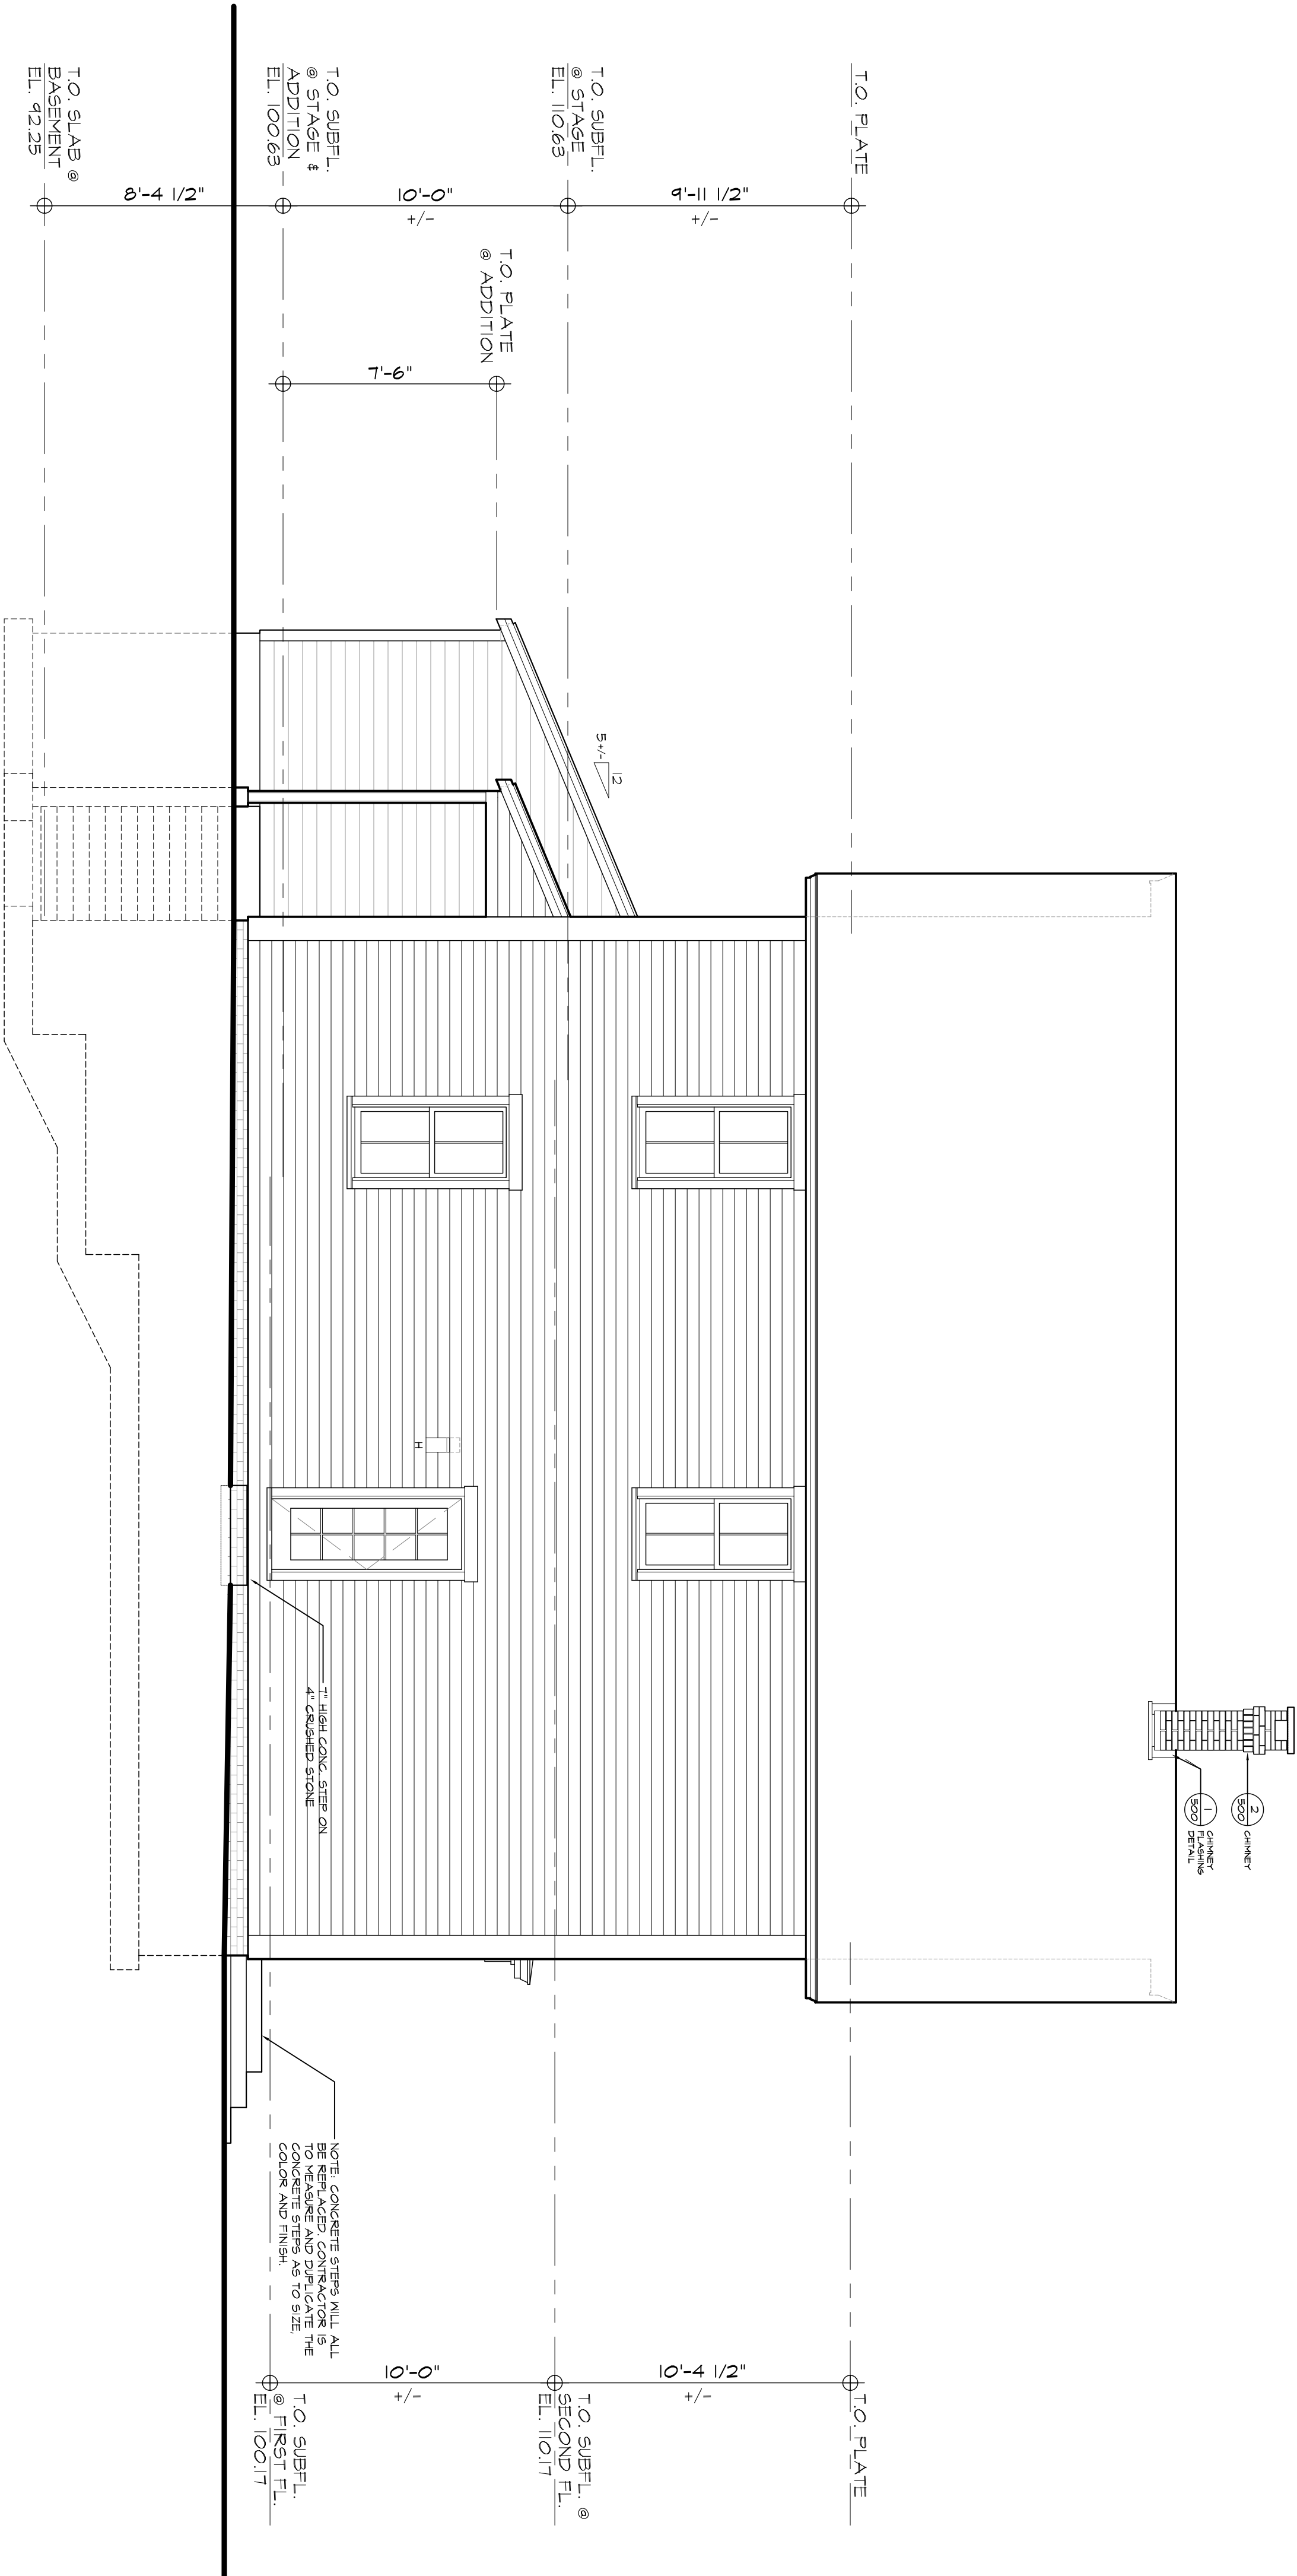

PROPOSED EAST ELEVATION

SCALE: 1/4"=1'-0"

Exterior Restoration Notes

East Elevation

Removals: Remove any deteriorated wood siding or trim, taking care to remove only the amount needed to effect a watertight and paintable repair. Remove substrate at badly deteriorated areas exposed at NE and SE ends and at existing door.

Restoration: Repair/restore wood framing, sheathing, siding and trim as listed in project specifications. Repair/replace door frame and threshold. Install new lead flashing below new door threshold. Paint all wood to match historic colors provided by project conservator.

Lighting Fixture: Install new fixture at exit door with emergency capacity specified.