

SOUTH WELLFLEET NEIGHBORHOOD ASSOCIATION & SOCIAL UNION

P.O. BOX 581
SOUTH WELLFLEET, MA 02663

Architect and Landscape Architect

HADLEY CROW STUDIO
Architect and Landscape Architect
P. O. BOX 1917 ORLEANS MA 02653
508.255.8001 info@HADLEYCROWSTUDIO.COM

Consulting Engineers

ROBERT SILLMAN ASSOCIATES
STRUCTURAL ENGINEER
133 South Street, 4th Floor
Boston, MA 02111
P: 617.552.0700 F: 617.552.1449

Plumbing Mechanical Electrical Engineer

JOHNSON ENGINEERING AND DESIGN, INC.
5 Elm Street, Suite 14, Danvers, MA 01923

Preservation Consultant

Rika Smith-McNally & Associates
Conservators of Objects and Sculpture

59 Fountain Street Box 55
4th Floor East, Studio 15
Framingham, MA 01702

ISSUED FOR BID

HADLEY CROW STUDIO
Architect and Landscape Architect
P. O. BOX 1917 ORLEANS MA 02653
508.255.8001 info@HADLEYCROWSTUDIO.COM


SWNASU
P.O. BOX 581
SOUTH WELLFLEET, MA 02663

REV	DATE	ISSUED FOR

SECTIONS AND DETAILS


DATE: 1/27/2012
SCALE: AS NOTED

DWG. NO. S-300

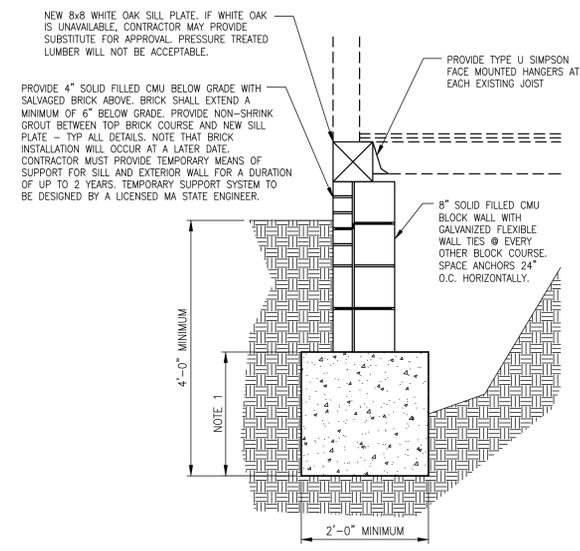


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 1
SCALE: 3/4"=1'-0"
S300

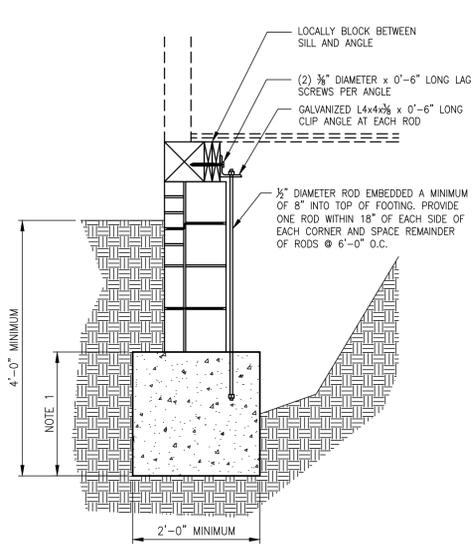


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 2
SCALE: 3/4"=1'-0"
S300

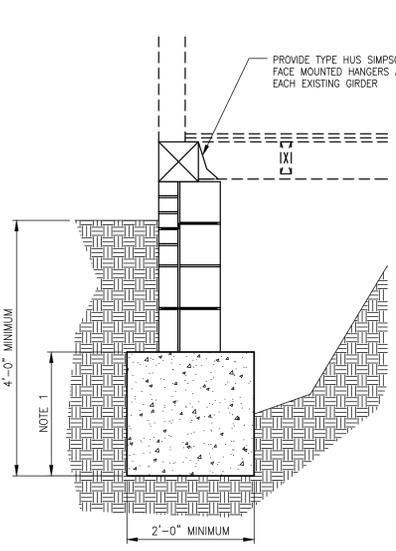


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 3
SCALE: 3/4"=1'-0"
S300

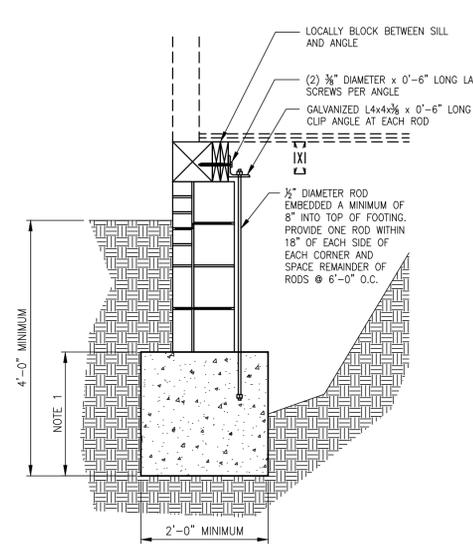


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 4
SCALE: 3/4"=1'-0"
S300

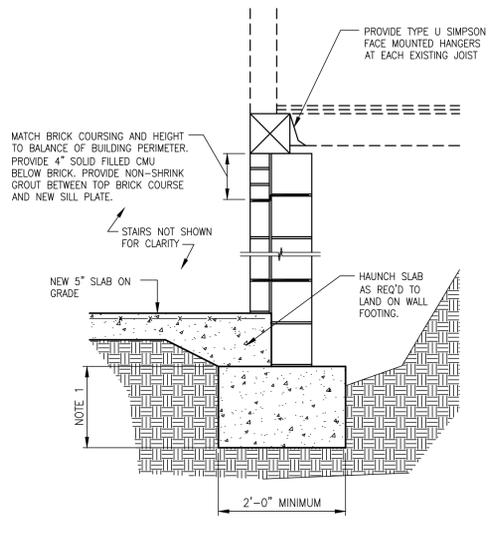


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 5
SCALE: 3/4"=1'-0"
S300

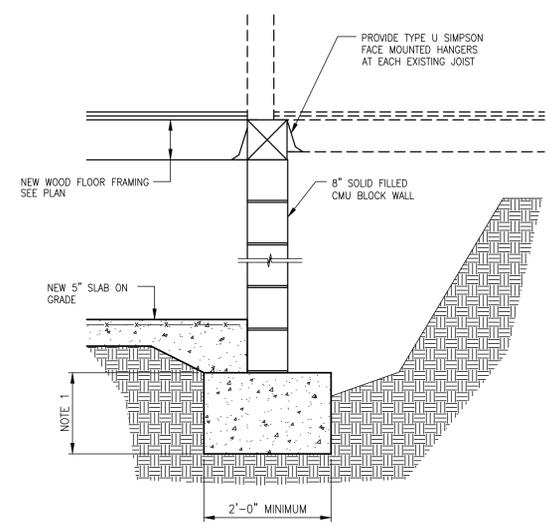


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 6
SCALE: 3/4"=1'-0"
S300

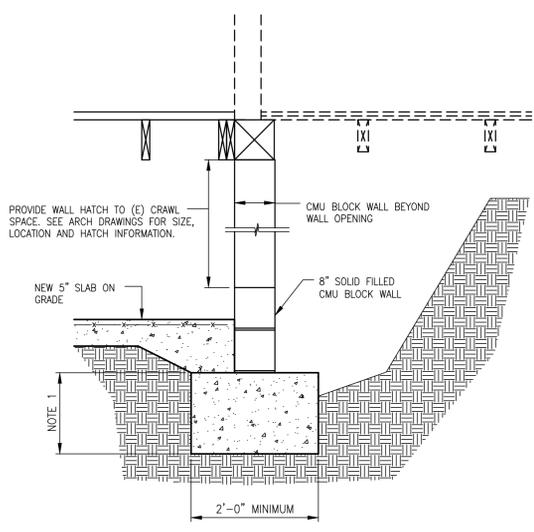


NOTES:
1. NEW CONTINUOUS FOOTING TO BE A MINIMUM OF 12" THICK. CONTRACTOR MAY FIELD ALTER THICKNESS AS NECESSARY TO ALLOW FOR BLOCK COURSING TO ALIGN WITH NEW SILL PLATE. FOOTINGS THAT ARE LESS THAN 18" THICK SHALL BE REINFORCED WITH (3) CONTINUOUS #5 BARS. FOOTINGS GREATER THAN 18" THICK CAN BE LEFT UNREINFORCED.

SECTION 7
SCALE: 3/4"=1'-0"
S300

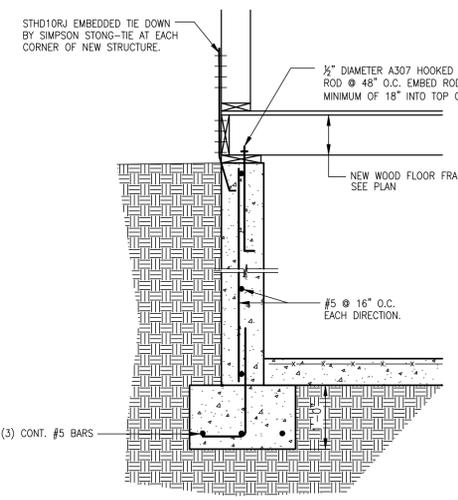

SECTION 8
SCALE: 3/4"=1'-0"
S300

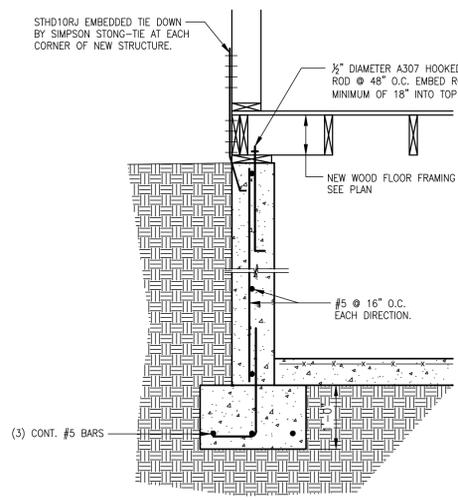

SECTION 9
SCALE: 3/4"=1'-0"
S300